








Gas generator for an air bag and air bag system

Patent number: EP0857627
Publication date: 1998-08-12
Inventor: TOMIYAMA SHOGO (JP)
Applicant: DAICEL CHEM (JP)
Classification:
- international: B60R21/26
- european: B60R21/26D2
Application number: EP19980101460 19980128
Priority number(s): JP19970026750 19970210

Also published as:

 JP10217899 (A)
 EP0857627 (B1)


Cited documents:

 EP0705739
 US5458371
 EP0694447
 EP0800964
 WO9802336

Abstract of EP0857627

An inflator showing stable operating capability is provided wherein an opening of a gas generator for an air bag which communicates with the atmosphere is closed by a moisture-proof seal tape (13) that is able to prevent a gas generating agent in the gas generator from absorbing moisture or water vapors.

The opening of the gas generator which communicates with the atmosphere is closed by the moisture-proof seal tape (13) comprising a substrate and an adhesive. The water vapor permeability of the seal tape is such that the rate of increase in the weight due to moisture absorption of the gas generating agent stored in the gas generator is 2.0% or smaller when the gas generator is left for 20 days in a constant-temperature, constant-humidity chamber kept at a temperature of 80 DEG C and humidity of 90%.

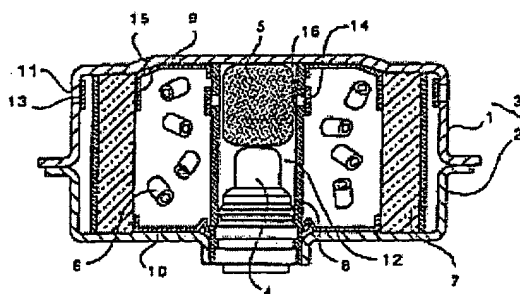Fig. 1

Data supplied from the esp@cenet database - Worldwide

Family list

10 family members for:

EP0857627

Derived from 7 applications.

- 1 Air generator for safety air bag and safety air bag unit**
Publication info: CN1093054B B - 2002-10-23
CN1190624 A - 1998-08-19
- 2 Gas generator for an air bag and air bag system**
Publication info: DE69810360D D1 - 2003-02-06
- 3 Gas generator for an air bag and air bag system**
Publication info: EP0857627 A1 - 1998-08-12
EP0857627 B1 - 2003-01-02
- 4 Gas generator for an air bag and air bag system**
Publication info: ID20991 A - 1999-04-01
- 5 AIR BAG GAS GENERATOR AND AIR BAG DEVICE**
Publication info: JP3425319B2 B2 - 2003-07-14
JP10217899 A - 1998-08-18
- 6 Gas generator for air bag and air bag system**
Publication info: US6170869 B1 - 2001-01-09
- 7 Method of making gas generator for air bag**
Publication info: US6324760 B1 - 2001-12-04

Data supplied from the esp@cenet database - Worldwide

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 857 627 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.08.1998 Bulletin 1998/33

(51) Int. Cl.⁶: B60R 21/26

(21) Application number: 98101460.8

(22) Date of filing: 28.01.1998

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 10.02.1997 JP 26750/97

(71) Applicant:

DAICEL CHEMICAL INDUSTRIES, LTD.
Sakai-shi, Osaka (JP)

(72) Inventor: Tomiyama, Shogo

Himeji-shi, Hyogo (JP)

(74) Representative:

Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)


(54) Gas generator for an air bag and air bag system

(57) An inflator showing stable operating capability is provided wherein an opening of a gas generator for an air bag which communicates with the atmosphere is closed by a moisture-proof seal tape (13) that is able to prevent a gas generating agent in the gas generator from absorbing moisture or water vapors.

The opening of the gas generator which communicates with the atmosphere is closed by the moisture-proof seal tape (13) comprising a substrate and an

adhesive. The water vapor permeability of the seal tape is such that the rate of increase in the weight due to moisture absorption of the gas generating agent stored in the gas generator is 2.0% or smaller when the gas generator is left for 20 days in a constant-temperature, constant-humidity chamber kept at a temperature of 80 °C and humidity of 90%.

Fig. 1

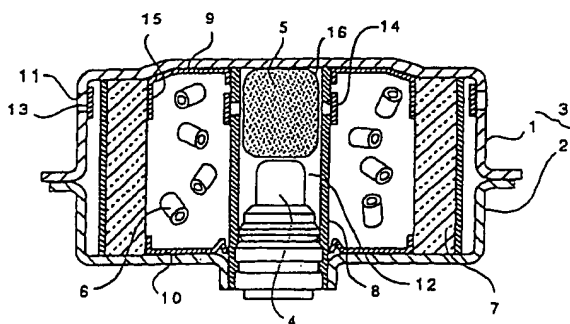

EP 0 857 627 A1

Description

[Field of the Invention]

The present invention relates to an air bag system for protecting a passenger from impacts, and in particular to a gas generator for an air bag which effectively prevents a gas generating agent from absorbing moisture or water vapors in the atmosphere, and has a stable operating capability.

[Description of the Prior Art]

When motor vehicles, such as automobiles, collide with something at a high speed, passengers of the vehicles may crush into hard or dangerous parts, such as a steering wheel or front glass, inside the vehicles, due to inertia. To prevent the passengers from being injured or killed by such crashes, an air bag system for an automobile has been developed wherein a bag is rapidly inflated by gases generated by a gas generating agent. The gas generating agent suitable for the automobile air bag system is required to satisfy very severe conditions. First, the bag must be inflated in a considerably short time, normally within 40 to 50 milliseconds. Gas generating agents generally used at present, which contain alkali metal salt or alkaline earth metal salt of hydrazoic acid, such as sodium azide, as a base, satisfy those conditions, and exhibit excellent characteristics.

Non-azide gas generating agents have also been developed which may replace the agents containing sodium azide as a base. For instance, Japanese laid-open Patent Publication No. 3-208878 discloses compositions containing tetrazole, triazole, or their metallic salts, and an oxygen containing oxidizing agent containing alkali metal nitrate, such as sodium nitrate, as major components. On the other hand, Japanese Patent Nos. 64-6156, 64-6157 disclose a gas generating agent having a metallic salt of bitetrazole compound containing no hydrogen as a major component. Further, Japanese laid-open Patent Publication No. 3-208878 discloses a gas generating agent having a transition metal complex of aminotetrazole as a main component. Many of the above-indicated compositions for the gas generating agent, however, contain oxidizing agents or others which exhibit considerably high degrees of hygroscopic property or deliquescence. Since the amount of water contained in the gas generating agent has a great influence on its burning characteristic, the conventional gas generator employs various methods for preventing the gas generating agent stored therein from absorbing moisture or water vapors. For example, the gas generating agent is contained in a thin, aluminum container, which is air-tightly closed by a lid with a sealing agent, and this container is mounted in the gas generator. This method, however, results in an increased cost, and makes it difficult to reduce the size of the inflator container. In this situation, there has been increasingly

employed in these days a gas generator having a seal tape attached to its gas discharge ports, so as to prevent moisture from entering the generator. The seal tape is formed by coating a moisture-proof film with an adhesive, such as a thermosetting adhesive or pressure sensitive adhesive. The use of such a seal tape makes it possible to significantly reduce the cost, and reduce the size of the gas generator. However, this seal tape is not so excellent in terms of a water vapor permeability, as compared with the above-described moisture-preventing method. Namely, the gas generator to which the seal tape is attached has a portion (side face of the tape) where the interior of the gas generator is shield from the exterior thereof strictly only by the adhesive of the seal tape. However, generally these adhesives contain chemical substances, such as those containing rubber, acrylic, silicone, or polyvinyl ether, as major components, for improving the adhesive strength or shear adhesion, and these chemical substances have relatively high water solubility or water dispersibility, thus allowing more or less water vapors to pass through the portion of the seal tape where only the adhesive is present, into the interior. Thus, the known seal tape cannot completely prevent moisture from entering the generator, and there is a possibility that water vapors permeate through the seal tape when the moisture reaches a certain level.

As described above, the main component of the adhesive generally used in the seal tape contains rubber, acrylic, silicone, or polyvinyl ether having relatively high water solubility or water dispersibility, so as to improve the adhesive strength or shear adhesion. When the seal tape is attached to a housing wall of the gas generator to close gas discharge ports formed there-through, and left under normal environments, for example, water vapors in the atmosphere are more or less moved through a portion where only the adhesive serves to block the water vapors, and enter the interior of the gas generator. When the seal tape is used for blocking entry of the water vapors, therefore, it is necessary to use a material having an excellent moisture-preventive property, while assuring the bonding and holding functions of the seal tape.

[Summary of the Invention]

It is therefore an object of the invention to provide a gas generator for an air bag using a seal tape for preventing water vapors from entering an inflator, which is free from the above problems encountered in the prior art.

As a result of diligent studies in an attempt to solve the above problems, the present inventors surprisingly found that if an opening of the gas generator that communicates with the atmosphere is closed by a seal tape which provides 2.0% or less of increase in the weight of the gas generator due to moisture absorption by its gas generating agent after the generator is left for a while

under humidified environments, the seal tape can accomplish moisture-proofing of the gas generating agent, with a significantly small influence on the performance of the gas generator for an air bag. The inventors have reached the present invention based on this finding.

Namely, the present invention relates to a gas generator for an air bag characterized in that an opening formed through the gas generator to communicate with the atmosphere is closed by a moisture-proof seal tape comprising a substrate and an adhesive, the seal tape having a water vapor permeability with which a rate of increase in a weight due to moisture absorption by a gas generating agent stored in the gas generator is not higher than 2.0% when the gas generator is left for 20 days in a constant-temperature, constant-humidity chamber kept at a temperature of 80°C and a humidity of 90%.

In the gas generator, the seal tape is firmly pressed by hand and attached to its inner cylindrical portion or housing to completely close communication holes open to the atmosphere, such as through-holes formed in the inner cylindrical portion, and gas discharge ports formed through the housing. The above-indicated rate of increase in the weight is obtained by measuring the weight of this gas generator after leaving it for 20 days in a constant-temperature, constant-humidity chamber kept at a temperature of 80 °C and humidity of 90%, and calculating a difference between the thus measured weight and the weight measured before it is left in the constant-temperature, constant-humidity chamber, so as to obtain a percentage of this difference with respect to the gas generating agent. In this case, in particular, the rate of increase in the weight is considered as the rate of water-vapor absorption of the gas generator.

Before and after the gas generator of the present invention is subjected to the above-described shelf test, the combustion evaluation of the gas generator was carried out. As a result, a significant difference was not observed between the performance of the gas generator before the humidified-condition shelf test, and that after the test. Thus, the gas generator, in which the seal tape of the present invention prevents moisture from entering the housing, exhibits stable operating capability or performance without being affected by water vapors in the atmosphere.

In particular, the seal tape used in the present invention preferably has a water vapor permeability as described below.

Namely, the seal tape for preventing moisture from entering the gas generator has a water vapor permeability with which the rate of increase in the weight due to moisture absorption of the gas generating agent per day is equal to or lower than 0.050%, when measured under the following conditions.

The conditions for measuring the water vapor permeability of the seal tape are as follows.

Any container may be used in the experiment, provided that it satisfies the following conditions.

vided that it satisfies the following conditions.

1. The container is formed of a material having 100% of moisture-preventive property, and shows no chemical changes and no significant expansion at a temperature of not higher than 100°C and a humidity of 100%. This container comprises at least a lid, a container body, and a member for ensuring air tightness of the container.
2. The container can be air-tightly closed, and has a 3mm-diameter circular hole formed through the lid.
3. The content volume of the container is not smaller than 1 cc.

Using the container that satisfies the above conditions, the container is filled with at least 0.80 g of the gas generating agent, and the moisture-proof seal tape of the inflator formed into a square of 10 mm x 10 mm is attached to the hole in the lid while a pressure of at least 5kg/cm² is uniformly applied to a surface of the tape, such that the center of the seal tape coincides with the center of the hole. Then, after the weight of the gas generating agent is measured in advance, the container is rapidly filled with the gas generating agent, and the lid is mounted and fixed in position so as to assure air tightness. After the air-tight container is left for 5 days to 25 days at a temperature of 80°C and a humidity of 90%, the container is disassembled, the weight of the gas generating agent is measured, and a rate of increase in the weight per day with respect to that of the gas generating agent is obtained.

When the seal tape, which limits the rate of increase in the weight due to moisture absorption of the gas generating agent to less than 0.050% per day under the above conditions, is used in the gas generator for preventing the gas generating agent from absorbing moisture, the operating capability of the gas generator is less likely to be influenced by water vapors transmitted from the atmosphere.

The seal tape used in the present invention preferably has a width that is 2 to 3.5 times the diameter of through-holes, such as gas discharge ports of the inflator, which are closed by the seal tape attached thereto. It is desirable that each of the spacing between the upper end portion of the through-holes and the upper edge of the seal tape and the spacing between the lower end portion of the through-holes and the lower edge of the seal tape is about 0.5 - 1.25 times the diameter of the through-holes. The seal tape desirably has a substrate formed from an aluminum foil. If the aluminum foil has a thickness of 25 μm or greater, the water vapor permeability is normally zero, and in this case the seal tape can be formed into a desired shape and attached with increased easiness, assuring high resistance to environments. For instance, the seal tape can be formed from an aluminum foil having a thickness of 50 μm or greater, and an adhesive having a thickness of 30

μm or greater. Where the thickness of the aluminum tape is $200\ \mu\text{m}$ or greater, the aluminum foil is unlikely to rupture even when gases are generated by burning the gas generating agent, and the pressure inside the inflator container may rapidly increase, resulting in breakage of the container at its joints. In such a case, the gas generator may fail to perform normal operations, and the container thus broken, its components, and uncooled gases may burst out, and possibly inflict injuries on a person or passenger. Accordingly, the thickness of the tape is desirably controlled to be in the range of 50 to $150\ \mu\text{m}$ when the aluminum foil is used as the substrate of the seal tape.

Further, a cover film, such as a resin film formed of fluororesin, may be provided on the substrate of aluminum foil, for example, so as to improve the corrosion resistance of the seal tape.

The substrate of the seal tape may be attached to a certain location by use of various kinds of adhesives, such as a pressure-type adhesive or a hot-melt adhesive. The hot-melt adhesive that is fused by application of heat is preferably used to securely bond the substrate to the certain location. The ratio of the thickness of the adhesive to that of the substrate of the seal tape is desirably in the range of 0.2 to 5.0 . A pressure sensitive adhesive may be desirably used as the adhesive. An acrylic- or silicone-containing adhesive is generally used as the pressure sensitive adhesive that is desired to exhibit high durability for a long period of time. The acrylic adhesive may contain acrylic ester as a main component, whose content is 40% or greater, wherein the number of carbons in a hydrocarbon radical bonded by reaction of alcohol in the ester is desirably 3 or greater, since properties of such an adhesive do not change even at below-freezing temperature that is possible in the global atmosphere. The silicone-containing adhesive desirably contains silicone rubber and silicone resin as main components. The adhesive strength or holding power (shear adhesion) of the adhesive may be generally measured based on JIS 0237, and when the measurement is effected on the seal tape having a width of $20\ \text{mm}$, the adhesive desirably has an adhesive strength of $1\ \text{kgf}$ or greater when it is peeled by 180° . Regarding the shear adhesion, it is desirable that the seal tape does not fall off after one hour, and is displaced or shifted by a distance of not larger than $1\ \text{mm}$.

In the inflator using the above-described moisture-proof seal tape for the gas generator, igniting means actuated upon detection of an impact, gas generating means including a gas generating agent that burns to generate gases, and a filter for cooling the generated gases are accommodated in the gas generator for an air bag, and through-holes, such as gas discharge ports, are closed by the seal tape for preventing moisture from entering the gas generator.

The housing of the gas generator of the present invention may be formed by welding a diffuser shell having gas discharge ports, to a closure shell having an

igniter storage opening.

In the above-indicated housing, there may be suitably accommodated members necessary to constitute the gas generator for an air bag, which include: igniting means comprising an igniter that is actuated by an impact, and a transfer charge that is ignited or fired by actuation of the igniter; gas generating agent that is fired by the ignited transfer charge to generate combustion gases; and a coolant/filter for removing combustion residues from the combustion gases thus generated while cooling the gases.

As the igniting means, any of igniters that are electrically ignited or mechanically ignited may be used. The mechanical igniter is obtained by combining a sensor that launches a plunger upon detection of an impact, and a detonator or detonating cap.

As the gas generating agents, those containing azide or not containing azide that are well known, may be used. The gas generating agent containing azide may be selected from those based on inorganic azide, in particular sodium azide, that has been widely used, including an equivalent mixture of soda azide and copper oxide. For the non-azide gas generating agent, there has been proposed various compositions, such as those containing tetrazole, triazole, or those containing a nitrogen containing organic compound of these metal salts or the like, and an oxygen containing oxidizing agent, such as alkali metal nitrate, as major components, or those containing triaminoguanidine nitrate, carbonylhydrazide nitroguanidine, dicyandiamide or the like as a fuel and a nitrogen source, and using nitrate, chlorate, or perchlorate of alkali metal or alkaline earth metal as an oxidizing agent. In view of the safety and other aspects, gas generating agents containing no azide are advantageously used.

The coolant/filter functions to remove combustion residues generated by combustion of the gas generating agent, and also functions to cool the combustion gases. For example, a wire screen or mesh sheet made of a stainless steel, such as SUS304, SUS310S, SUS316 (according to Japanese Industrial Standard), is formed into an annular layered body, which is then compressed into a desired shape, for use as a coolant/filter. The coolant/filter may be also formed by combining a filter and a coolant, which have been conventionally widely used.

Brief Description of the Drawings

Fig. 1 is a vertical cross sectional view of a gas generator according to one embodiment of the present invention;

Fig. 2 is a vertical cross sectional view of a gas generator according to another embodiment of the present invention;

Fig. 3 is a view showing the construction of an air bag system; and

Fig. 4 is a graph showing results of combustion

evaluation on inflators.

Description of Reference Numerals

- 1 Diffuser shell
- 2 Closure shell
- 3 Housing
- 4 Igniter
- 5 Transfer charge
- 6 Gas generating agent
- 7 Coolant/filter
- 11 Gas discharge port
- 13 Seal tape
- 14 Through-hole

Detailed Description of the Preferred Embodiments

Fig. 1 shows a gas generator constructed according to the present invention. The gas generator includes a housing 3 consisting of a diffuser shell 1 and a closure shell 2, a central cylindrical member 8 disposed in the housing 3 to provide a partition wall, igniting means comprising an igniter 4 and a transfer charge 5 disposed in a hollow portion of the central cylindrical member 8, namely, in an igniting means storage chamber 12, and solid masses of gas generating agent 6 that are ignited by the igniting means to generate combustion gases. The gas generator further includes a coolant/filter 7 disposed around the masses of gas generating agent 6, for cooling and purifying the generated gases, and support members in the form of plate members 9, 10 which are disposed at upper and lower end portions of the coolant/filter 7. In this gas generator or inflator, a seal tape 13 is attached to a portion of an outer surface of the central cylindrical member 8 in the housing 3 so as to close through-holes 14 formed in this portion, and a seal tape 13 is attached to a portion of an inner surface of the housing 3 so as to close gas discharge ports 11 through which the generated gases are discharged. These seal tapes serve to prevent moisture from entering the interiors of the housing 3 and central cylindrical member 8.

When a sensor detects an impact, and its signal is transmitted to the igniter 4 of the gas generator, the igniter 4 is actuated to fire the transfer charge 5 in the igniting means storage means 16 thereby generating a high-temperature flame. This flame is ejected through the through-holes 14 to ignite the masses of gas generating agent 6 in the vicinity of the through-holes 14, and then directed downward by a circumferential wall portion 15 of the plate member 9 so as to ignite the masses of gas generating agent 6 in a lower portion of the gas generating agent storage chamber. As a result, the gas generating agent masses 6 are burned to generate high-temperature, high-pressure gases, and the combustion gases thus generated pass through the whole region of the coolant/filter 7 such that the gases are effectively cooled and combustion residues are scav-

enged or removed during the passage. The combustion gases thus cooled and purified then pass through a gas passage, and rupture the seal tape 13 to be ejected through the gas discharge ports 11 and flow into an air bag.

Fig. 2 is a cross sectional view of a gas generator for an air bag constructed according to another embodiment of the present invention. The present gas generator includes a housing 21 consisting of a diffuser shell 19 and a closure shell 20, filter means in the form of a coolant/filter for defining a combustion chamber 22 in the housing 21, an igniter 18 disposed in the combustion chamber 22, and solid masses of gas generating agent 6 disposed around the igniter 18. The gas generating agent masses 6 are ignited upon actuation of the igniter 18 to generate combustion gases.

The diffuser shell 19 and closure shell 20 are formed by pressing stainless steel sheets. A plurality of gas discharge ports 11 are formed through an outer peripheral portion of the housing that provides an outer circumferential wall, such that the discharge ports 11 are equally spaced apart from each other in the circumferential direction. The seal tape 13, as described above, is attached to the housing 21 to close the gas discharge ports 11 so as to prevent entry of moisture from the outer space into the gas generator. The plate member 17 serves to restrict movement of the masses of gas generating agent 6 filling the combustion chamber 22. The plate member 17 has an outer circumferential portion which abuts on an inner circumferential surface of one end portion of the coolant/filter 7 to cover this inner circumferential surface, thereby preventing the combustion gases from short-passing through a clearance between the one end portion of the coolant/filter and the inner wall of the diffuser shell, without passing the filter.

Fig. 3 is a view showing the construction of an air bag system. This air bag system includes the above-described gas generator of the present invention, an air bag (bag body) 100, and a module case 101. The gases discharged from the gas discharge ports 11 of the gas generator are ejected into the air bag 100, whereby the air bag 100 breaks the module cover 102 and inflates or expands out of the cover 100, so as to form a cushion for absorbing the impact between a steering wheel 103 and a passenger.

A gas generator, as described based on Figs. 1-3, is used as the gas generator.

The module case, made of a polyurethane, for example, includes a module cover 102. The airbag 100 and the gas generator are installed inside the module case 101 and forms a pad module. The pad module is attached to the steering wheel 103.

The air bag 100 is formed of nylon (nylon 66, for example), or polyester, and fixed to a flange formed on the outer periphery of the gas generator as it is folded, with its opening surrounding the gas discharge ports 11 of the gas generator.

The gas generator of the present invention does not suffer from significant reduction in the combustion capability when the seal tape attached to the partition wall or housing for closing the gas ejection holes or discharge ports has a water vapor permeability that is lower than a reference value determined as a result of a certain experiment. In the air-bag gas generator that is required to be resistant to severe environments for a long period of time, the use of the above seal tape avoids reduction in the combustion speed due to water vapors absorbed by the gas generating agent, assuring improved operating reliability of the air bag upon occurrence of an impact. The gas generator for an air bag as described above may be used to provide an air bag system that operates with increased safety.

Examples

While some examples of the present invention and comparative examples will be now shown to explain the invention in greater detail, the present invention is by no means limited to the details of these examples.

Example 1

(Evaluation on water vapor permeability of seal tape)

A cylinder made of SUS 304 and having a diameter of 35 mm and a height of 17 mm is prepared which has a concavity having a diameter of 10 mm and a depth of 13 mm, and an end face in which a recess having a width of 3 mm and a depth of 1.5 mm is formed so as to receive a moisture-proof packing. A lid in the form of a disc similarly made of SUS 304 is also prepared which has a diameter of 35 mm and a height of 1 mm, and is formed at its center with a 3mm-diameter hole. A container used for the evaluation may be obtained by fastening this lid to the above cylinder with screws threaded at four locations from the above of the lid, with the packing sandwiched between the lid and the cylinder. A seal tape formed into a square of 10mm x 10mm is attached to a central portion of the lid of the container, with a force of 5 kg/cm² being uniformly applied to the seal tape. The container is filled with a gas generating agent accurately measured to 0.8000g, and the lid to which the seal tape is attached is firmly screwed to the cylinder, such that the seal tape is placed on the inner side of the lid, with a 2mm-thickness, silicon packing being sandwiched between the lid and the cylinder.

The thus sealed container is left for 24 days under an environment where the temperature is 80°C or higher, and the humidity is 90% or higher. Then, the container is disassembled, and the weight of the gas generating agent is measured with high accuracy, so as to calculate the rate of increase in the weight per day with respect to 0.8000 g of the gas generating agent.

(Gas generator for air bag)

In the gas generator for an air bag constructed as shown in Fig. 1, the content volume of the housing and the total area of the through-holes are shown below:

Content volume of the housing: 103 cc

Total area of through-holes of housing : 146.01 mm²

Area of outer through-holes : (1.5 mm)² x 3.14 x 18 = 127.17 mm²

Area of inner through-holes : (1.0 mm)² x 3.14 x 6 = 18.84 mm²

(Evaluation on water-vapor absorption percentage of inflator)

In the gas generator for an air bag constructed as described above, a seal tape having a width of 10 mm and a length of 65 mm and a seal tape having a width of 10 mm and a length of 205 mm were firmly pressed by hand against the inner cylindrical portion and outer cylindrical portion of the housing, respectively, so as to completely close the through-holes 14 formed in the inner cylindrical portion, and the gas discharge ports 11 formed in the outer cylindrical portion. The weight of the gas generator was measured after it was left for 20 days in a constant-temperature, constant-humidity chamber kept at a temperature of 80°C and a humidity of 90%, and a difference between this weight and the weight of the inflator before it was left in the constant-temperature, constant-humidity chamber was calculated. A percentage of this difference with respect to the weight of the gas generating agent was obtained as a water-vapor absorption percentage of the inflator.

(Evaluation on inflator combustion)

According to the evaluation method as described above, some characteristics of a moisture-proof seal tape were evaluated. The results of the evaluation on the moisture-proof seal tape used in this example are as follows:

Trade name: Nitotoil AT-50 manufactured by Nitto Denko Corporation

Structure : about 50 μm-thickness aluminum foil and about 50 μm-thickness adhesive

Water vapor permeability (rate of increase in the weight per day) : 0.030%

Water vapor absorption percentage of inflator: 0.37%

The combustion in the inflator using the above seal tapes was evaluated. To evaluate the combustion, the temperature of the gas generator was controlled to 20°C immediately after it was left as described above, and this gas generator was fixed to the inside of a non-

inflatable metallic tank of 60 liter, which was then fluid-tightly closed. Then, a signal was transmitted to the gas generator to initiate ignition. Fig. 4 shows a measurement result of pressure changes in the tank detected by a sensor, with respect to time, during the igniting operation of the gas generator. A significant difference was not observed between the thus obtained result, and a result (indicated as reference "a" in Fig. 4) of combustion evaluation on the gas generator which was not left as described above.

Example 2

According to the evaluation method similar to that of Example 1, the characteristics of a moisture-proof seal tape were evaluated. This example is identical with Example 1 except that the seal tape as specified below was used as the moisture-proof seal tapes of the inflator.

Trade name: BYTAC AF-21 manufactured by Norton Company

Structure : about 25 μm -thickness Teflon FEP, about 50 μm -thickness aluminum foil and about 30 μm -thickness adhesive

Water vapor permeability (rate of increase in the weight per day) : 0.036%

Water vapor absorption percentage of inflator: 1.59%

The result of combustion evaluation on the inflator using the above-specified seal tapes is shown in Fig. 4. A significant difference was not observed between the thus obtained result, and a result of combustion evaluation on the gas generator which was not left as described above.

Comparative Example 1

According to the evaluation method similar to that of Example 1, the characteristics of a moisture-proof seal tape were evaluated. This example is identical with Example 1 except that the seal tape as specified below was used as the moisture-proof seal tapes of the inflator.

Trade name: #433L manufactured by Sumitomo 3M

Structure : about 50 μm -thickness aluminum foil and about 30 μm -thickness adhesive

Water vapor permeability (rate of increase in the weight per day) : 0.060%

Water vapor absorption percentage of inflator: 5.41%

The result of combustion evaluation on the inflator using the above-specified seal tapes is shown in Fig. 4. A remarkable difference was observed between the thus obtained result, and a result of combustion evaluation on the gas generator which was not left as described above.

tion on the gas generator which was not left as described above.

Comparative Example 2

According to the evaluation method similar to that of Example 1, the characteristics of a moisture-proof seal tape were evaluated. This example is identical with Example 1 except that the seal tape as specified below was used as the moisture-proof seal tapes of the inflator.

Trade name : #439L manufactured by Sumitomo 3M

Structure : about 50 μm -thickness aluminum foil and about 30 μm -thickness adhesive

Water vapor permeability (rate of increase in the weight per day) : 0.083%

Water vapor absorption percentage of inflator: 6.81%

The result of combustion evaluation on the inflator using the above-specified seal tapes is shown in Fig. 4. A remarkable difference was observed between the thus obtained result, and a result of combustion evaluation on the gas generator which was not left as described above.

Example 3

According to the evaluation method similar to that of Example 1, the characteristics of a moisture-proof seal tape were evaluated. This example is identical with Example 1 except that the seal tape as specified below was used as the moisture-proof seal tapes of the inflator.

Trade name: Nitofoil AT-80 manufactured by Nitto Denko Corporation

Structure : about 80 μm -thickness aluminum foil and about 50 μm -thickness adhesive

Water vapor permeability (rate of increase in the weight per day) : 0.037%

Water vapor absorption percentage of inflator: 0.46%

The result of combustion evaluation on the inflator using the above-specified seal tapes is shown in Fig. 4. A significant difference was not observed between the thus obtained result, and a result of combustion evaluation on the gas generator which was not left as described above.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following

claims.

Claims

1. A gas generator for an air bag comprising:

a moisture-proof seal tape which closes an opening formed in the gas generator, the opening communicating an inside space of the gas generator with the outside atmosphere thereof, said seal tape including a substrate and an adhesive, wherein said seal tape having a water vapor permeability with which a rate of increase in a weight due to moisture absorption by a gas generating agent stored in the gas generator is not higher than 2.0% when the gas generator is left for 20 days in a constant - temperature, constant-humidity chamber kept at a temperature of 80°C and a humidity of 90%.

2. A gas generator for an air bag comprising:

a moisture-proof seal tape used in order to prevent a gas generating agent stored in the gas generator from absorbing moisture, said seal tape comprising a substrate and an adhesive, wherein said seal tape has a water vapor permeability with which a rate of increase in a weight due to moisture absorption by the gas generating agent is not higher than 0.05% per day, when measured under the following measurement conditions:

1. A container is formed of a material having 100% of moisture-preventive property, and showing no chemical changes and no significant expansion at a temperature of not higher than 100°C and a humidity of 100%, said container comprising at least a lid, a container body, and a member for ensuring air tightness of the container,
2. wherein said container can be air-tightly closed, and has a 3 mm diameter circular hole formed through its lid, and
3. the content volume of the container is not smaller than 1 cm³; the container satisfying the above conditions is filled with at least 0.80 g of the gas generating agent, and the moisture-proof seal tape is formed into a square of 10 mm x 10 mm is attached to the hole of the lid while a pressure of 5kg/cm² is uniformly applied to a surface of the tape, such that a center of the seal tape coincides with a center of the hole, and after the weight of the gas generating agent used has been measured in advance, the container is rapidly filled with the gas generating agent, and the lid is

mounted and fixed in position so as to ensure air tightness, whereas after the air-tight container is left for 5 days to 25 days at a temperature of 80°C and a humidity of 90%, whereupon the container is disassembled, the weight of the gas generating agent is measured, and the rate of increase in the weight per day with respect to the gas generating agent is obtained.

3. A gas generator for an air bag according to claim 1 or claim 2, wherein said moisture-proof seal tape of the inflator has a substrate formed of aluminum.
4. A gas generator for an air bag according to any one of claims 1 - 3, wherein said moisture-proof seal tape of the inflator has a thickness in a range of 50 µm to 150 µm.
5. A gas generator for an air bag according to claim 4, wherein a proportion of the adhesive with respect to the substrate in the moisture-proof seal tape of the inflator is in a range of 0.2 to 5.0.
6. A gas generator for an air bag according to any one of claims 1 - 5, wherein the adhesive of the moisture-proof seal tape of the inflator is a pressure sensitive adhesive.
7. A gas generator for an airbag according to claim 6, wherein the pressure sensitive adhesive of the moisture-proof seal tape of the inflator is an acrylic adhesive.
8. A gas generator for an air bag according to any one of claims 1 - 7, wherein said moisture-proof seal tape of the inflator has a width that is 2 - 3.5 times a diameter of a through-hole closed by the seal tape attached thereto.
9. A gas generator for an air bag according to anyone of claims 1 - 8, wherein each of a spacing between an upper end portion of the through-hole and an upper edge of the seal tape and a spacing between a lower end portion of the through-hole and a lower edge of the seal tape is about 0.5 - 1.25 times a diameter of the through-hole.
10. An air bag system characterized by comprising:
 - a gas generator for an air bag, for generating a gas upon detection of an impact;
 - an air bag which is inflated by the gas generated by said inflator; and
 - a module case that stores said air bag, wherein said gas generator for an air bag is the gas generator for an air bag as defined in any one of claims 1-9.

Fig. 1

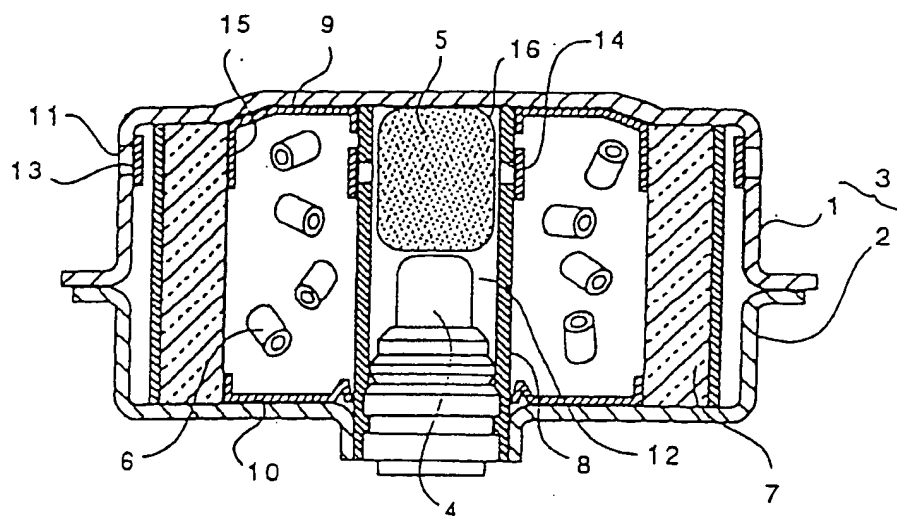


Fig. 2



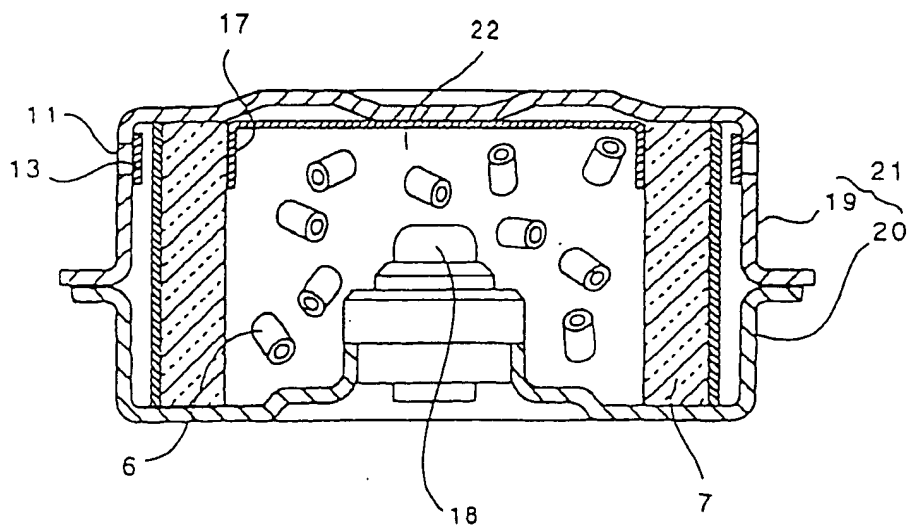


Fig. 3

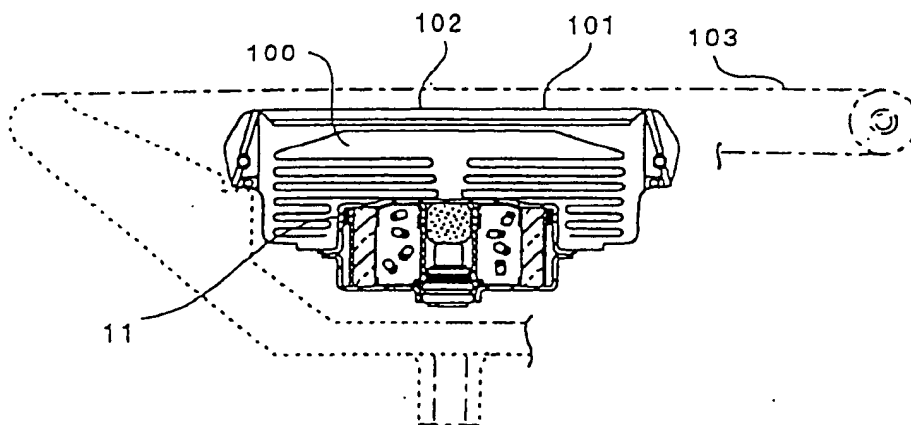

Output Pressure
in 60l Tank
(kgf · cm⁻¹)

Fig. 4

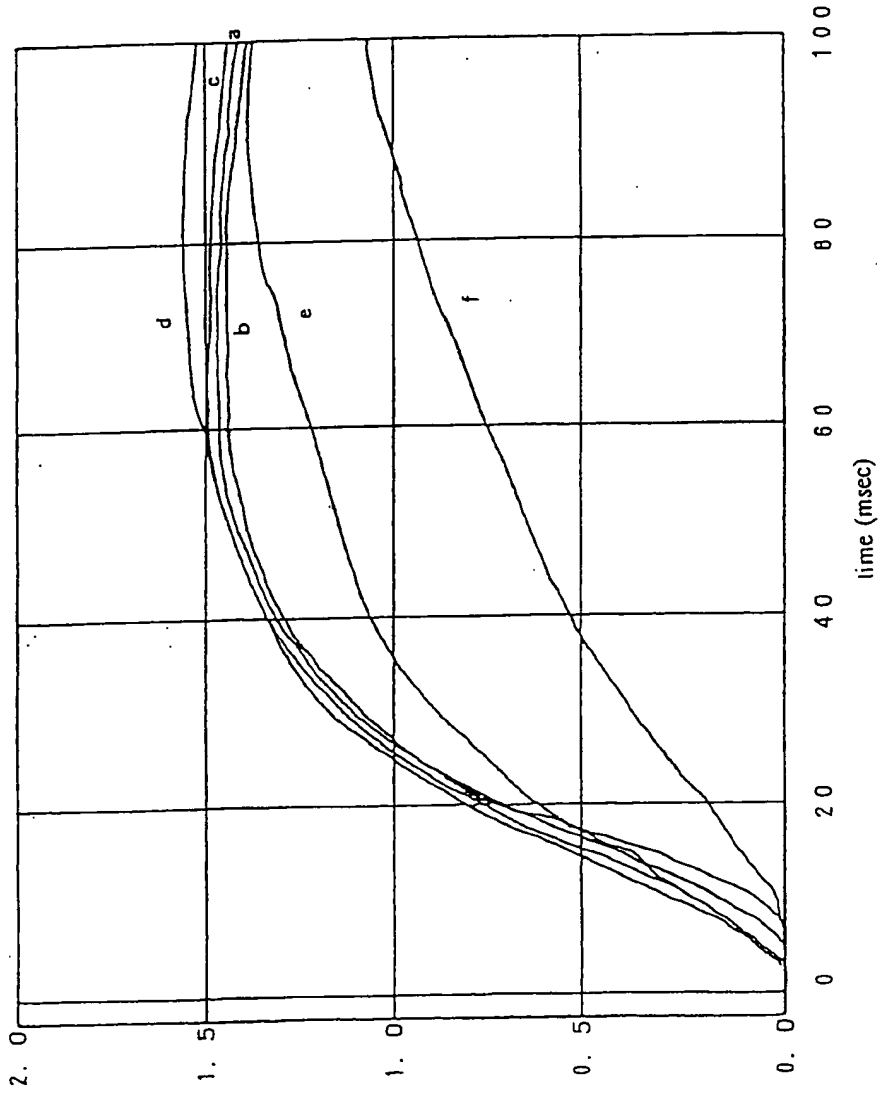



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 1460

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	EP 0 705 739 A (MORTON INT INC) 10 April 1996 * figure 1 * * abstract * * column 4, line 24 - column 5, line 12 *	1-3,10	B60R21/26
A	US 5 458 371 A (FULMER BRIAN H ET AL) 17 October 1995 * figure 1 * * abstract * * column 4, line 5 - line 24 *	1-3,10	
A	EP 0 694 447 A (MORTON INT INC) 31 January 1996 * figure 2 * * abstract * * column 4, line 45 - column 5, line 7 *	1-3,10	
P,A	EP 0 800 964 A (DAICEL CHEM) 15 October 1997 * abstract; figure 16 * * page 13, line 53 - line 54 *	1-3,10	
P,A	WO 98 02336 A (TAGUCHI SEIGO ; TANAKA KOJI (JP); SASO TAKASHI (JP); SENSOR TECH KK) 22 January 1998 * abstract *	1-3,10	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B60R
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 5 June 1998	Examiner D'sylva, C
CATEGORY OF CITED DOCUMENTS X particularly relevant if taken alone Y particularly relevant if combined with another document of the same category A technological background O non-written disclosure P intermediate document T theory or principle underlying the invention E earlier patent document, but published on, or after the filing date D document cited in the application L document cited for other reasons S member of the same patent family, corresponding document			

EPC FORM 1503 03 82 (P04/01)